

Tellabs® 1000 Multiservice Access Series Internet Protocol Management Interface Card-3 (IPMI-3)

Overview

The Tellabs 1000 Multiservice Access Platform (MSAP) Series Internet Protocol Management Interface (IPMI-3) plug-in card provides secure, remote access to the Tellabs® 1000 MSAP series and supports IP/ATM in-band or out-of-band management, which enables management functions without the need of an LAN or WAN connection. The IPMI-3 leverages current broadband infrastructure and utilizes a single Virtual Circuit Connection (VCC) to carry management data. The IPMI-3 has in-band LAN connectivity as a standard feature. If out-of-band LAN connectivity is required, an optional cable can be purchased.

Installing the IPMI-3 card connects you to the Craft User Interface (CUI) via Telnet sessions, allowing you to see your Tellabs 1000 MSAP series system as if you were connected to the system locally via DB-9 connector. When used with Tellabs 1000 MSAP series Utility Package (AUP), it allows software upgrades and database backups remotely. Use the IPMI-3 card with Tellabs® 1090 Network Management System (NMS). Using the IPMI-3 with Tellabs® 1090 NMS, the single user GUI NMS, enables on-site use of the CUI DB-9 connector.

The IPMI-3 plug-in card hosts a number of applications, such as Telnet and a Simple Network Management Protocol (SNMP) agent. The IPMI-3 card supports up to ten concurrent TL1 sessions over TCP-IP connections. Only one IPMI-3 card is required per system. Inserted into any one of the general purpose slots in the primary shelf of the Local Exchange Terminal (LET), the IPMI-3 card quickly pays for itself in saved time and resources. Connect with the following interfaces, which can be used independently of one another:

- Telnet session — supports a remote interface to the CPU Craft Interface
- AUP — remote access for upgrades and backups
- SNMP interface — supports Tellabs® 1090 NMS operations. SNMP is an application layer protocol utilizing the standard Management Information Base (MIB) and a Tellabs 1000 MSAP series enterprise MIB. The enterprise MIB has been optimized for performance and security.
- TL1 TCP/IP Interface — provides fault management and narrow-band service provisioning/activation features via TL1 over TCP/IP: the IPMI-3 plug-in card supports up to ten concurrent TL1 sessions over TCP-IP connections.

Features and Benefits

Remote access to your CUI

You get the same view you would have if you were physically connected to the equipment at the equipment's location. The IPMI-3 allows in-house monitoring and can significantly reduce the amount of resources expended for trips to customer sites for every alarm and upgrade. Quick access to alarms speeds up identification, isolation and resolution.

Remote access for AUP (Tellabs 1000 MSAP series Utility Package)


You can upgrade to the latest software by system or slot. You can remotely perform database backups, scheduled or on-demand, and database restores, reducing the need for modems and on-site visits. Readily available backup information allows for quicker resolution in any crisis. Maintenance from offsite adds a layer of security.

Using an IPMI-3 card also enables remote access with Tellabs 1090 NMS. With a simple point-and-click GUI, the Tellabs 1090 NMS enables human-to-machine interfaces and TL1 is utilized for machine-to-machine operations. The Tellabs NMS supports Fault, Configuration, Performance and Security (FCAPS) management for the Tellabs 1000 MSAP series. TR-08, GR-303 and V.5x provisioning is easy, enabling quick deployments and accelerating time-to-revenue.

Features and Benefits

On-site access with a single user point-and-click GUI that supports Fault, Configuration, Performance, and Security (FCAPS) management of the Tellabs 1000 MSAP series system. Access is either remote or through the DB-9 on the front of the shelf.

- Ability to host an SNMP agent
- Telnet connection to Tellabs 1000 MSAP series Craft Interface
- Enables AccessManager, Tellabs NMS
- Single-user NMS
- Conforms to MIB standards
- Supports TL1 over TCP/IP

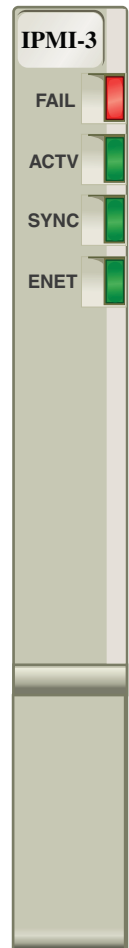

Specifications

Interface

- In-band IP/ATM
- Out-of-band Ethernet RJ-45

Environmental

- Operating temperature: -32° F to +149° F
(0° C to +65° C)
- Humidity: 5–95% noncondensing
- Maximum power consumption: 2.5 W

Dimensions

- Height: 5.125 in (13.018 cm)
- Width: 0.563 in (1.429 cm)
- Depth: 10.5 in (26.67 cm)

Weight

- 0.5 lb (0.23 kg)
- Status LEDs
- Three LEDs on the IPMI-3 faceplate show card status:
 - A green ACTV LED indicates the plug-in card is active and can communicate properly with the CPU
 - A red FAIL LED indicates that the card has failed or is unable to communicate with the CPU
 - A green SYNC LED indicates an active Telnet session
 - A green ENET LED indicates an Ethernet connection is present

North America

Tellabs
One Tellabs Center
1415 West Diehl Road
Naperville, IL 60563
U.S.A.
+1 630 798 8800
Fax: +1 630 798 2000

Asia Pacific

Tellabs
3 Anson Road
#14–01 Springleaf Tower
Singapore 079909
Republic of Singapore
+65 6215 6411
Fax: +65 6215 6422

Europe, Middle East & Africa

Tellabs
Abbey Place
24–28 Easton Street
High Wycombe, Bucks
HP11 1NT
United Kingdom
+44 870 238 4700
Fax: +44 870 238 4851

Latin America & Caribbean

Tellabs
1401 N.W. 136th Avenue
Suite 202
Sunrise, FL 33323
U.S.A.
+1 954 839 2800
Fax: +1 954 839 2828

Statements herein may contain projections or other forward-looking statements regarding future events, products, features, technology and resulting commercial or technological benefits and advantages. These statements are for discussion purposes only, are subject to change and are not to be construed as instructions, product specifications, guarantees or warranties. Actual results may differ materially.

The following trademarks and service marks are owned by Tellabs Operations, Inc., or its affiliates in the United States and/or other countries: TELLABS®, TELLABS and T symbol®, and T symbol®.

Any other company or product names may be trademarks of their respective companies.

© 2008 Tellabs. All rights reserved.
74.1614E Rev. B 5/08